


Data Sheet for Article: HSELS169CG

FO Splicebox, 16 Fibers, SC, 9/125µm OS2, 19", 1U

RAL7035, sliding, pigtails inserted and prepared ready for splicing, PREMIUM



SCHRACK-Info

FO splice box extendable with quick release fastener and equipped with Grade B pigtails for splicing FO cables. The pull-out depth of 20 cm ensures easy access to the couplings. Furthermore the box can be set back by 40 mm. A possibility for the sloping input of section cables is integrated.

Properties Housing:

- 19", 1U installation, extendable
- incl. Depth adjustment
- front panel and side parts powder-coated
- colour: grey, RAL7035
- Lid metallic glossy
- Central screw bolt for fixing up to 4 splice cassettes
- Box can be tilted downwards when open

Standards:

50173-1, EN 61300-3-6, EN 61300-3-77



Technical Data

Net width (mm)	482,50
----------------	--------

Technical Data - continued

Net height (mm)	43,60
Netto depth (mm)	211,50
Net weight (kg)	2,70
Fiber	9/125 OS2 Singlemode / G.657.A1
Colour	RAL 7035 (Light grey)
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	70
Fibre count	16
Coupler/Connector	SC

Dimension drawing

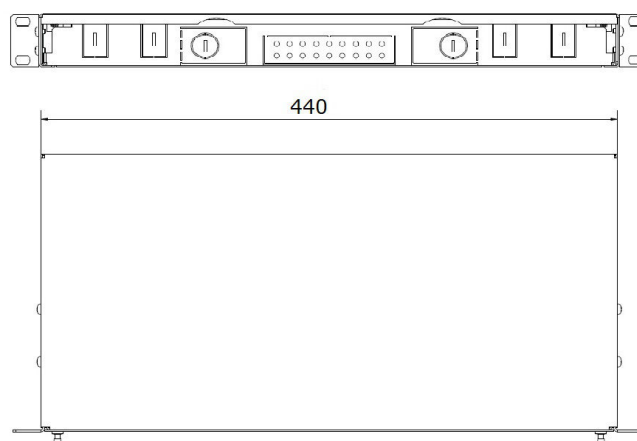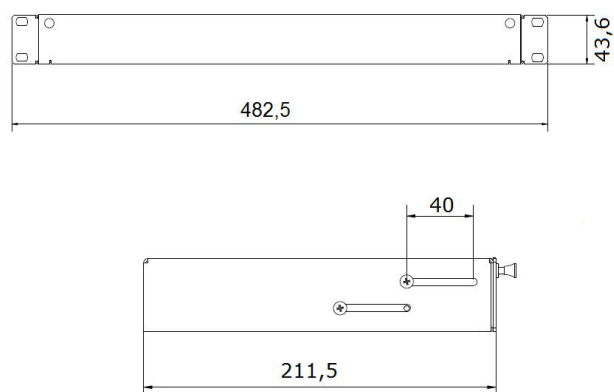

Article Table

DESCRIPTION	Order No.
FO Splicebox, 16 Fibers, SC, 9/125µm OS2, 19", 1U	HSELS169CG
RAL7035, sliding, pigtails inserted and prepared ready for splicing, PREMIUM	
Optional Accessories	
FO shrink splice protector 60mm	HELSP00011
FO shrink splice protector 45mm	HELSP00010
Fiber Optics Cleaning Tool for SC, ST, FC and E2000	HSELSZT002
Suitable for UPC and APC connectors. More than 1,000 cleaning cycles.	

Article Table

DESCRIPTION	Order No.
Optional Accessories	
FO Power meter with integrated laser light source (VFL) and RJ45-copper cable test. ATTENTION: This is a Laser Class 2 product. Do not stare into the beam. Always keep the cover on the VFL port when not in use. It is recommended to use laser safety glasses when working with fiber optic systems.	HSELSZT003
FO Patchcord Duplex SC/UPC - SC/UPC, 9/125µm OS2, 2.0m LSOH, yellow	HLP29CC02F
FO Patchcord Duplex SC/UPC - SC/UPC, 9/125µm OS2, 5.0m LSOH, yellow	HLP29CC05F
FO Patchcord Duplex LC/UPC - SC/UPC, 9/125µm OS2, 2.0m LSOH, yellow	HLP29LC02F
FO Patchcord Duplex LC/UPC - SC/UPC, 9/125µm OS2, 5.0m LSOH, yellow	HLP29LC05F
FO Patchcord Duplex ST/UPC - SC/UPC, 9/125µm OS2, 2.0m LSOH, yellow	HLP29TC02F
FO Patchcord Duplex ST/UPC - SC/UPC, 9/125µm OS2, 5.0m LSOH, yellow	HLP29TC05F
FO Patchcord Duplex SC/UPC - FC/UPC, 9/125µm OS2, 2.0m LSOH, yellow	HLP29CF02F
FO Patchcord Duplex SC/UPC - FC/UPC, 9/125µm OS2, 5.0m LSOH, yellow	HLP29CF05F