

Data Sheet for Article: IGZGSW15--

Wall-mounted counter frame for Vienna with 15 counter places

pre-wired, metal housing with meter panel made of plastic



SCHRACK-Info

- 1,2mm Pulverbeschichteter Stahlblechrahmen mit Kunststoff Rückwand
- Kunststofffrontplatten
- gebaut nach EN61439-1
- Anschlussfertig
- Anschlussmöglichkeit bis 70mm²
- mit schaltbaren D02/25A 3-poligen Vorzählersicherungen
- inklusiver N- und PE-Klemmen und 10mm² Zählerschleife je Zählerplatz auf Reihenklempen 10mm² verdrahtet
- mit doppelter Neutralleiterführung
- Schutzklasse: I
- Schutzart: IP20C
- Farbe: RAL7035 (Lichtgrau)



Technical Data


Net width (mm)	1.055,00
----------------	----------

Created online on 2026-04-23, No liability for errors. All information subject to change.

Technical Data - continued

Net height (mm)	1.900,00
Netto depth (mm)	155,00
Net weight (kg)	73,00
EAN	9007985001009
Power loss (W)	-840,00
Material	Metal housing Meter panel made of plastic
Austrian province	Vienna
Protection class	1
Cross-section (mm ²)	10
mounting	surface-mounted
Colour	RAL 7035 (Light grey)
Meter slots	15
Width (mm)	1055
Height (mm)	1910
Depth (mm)	180

Dimensioned drawing: Wall-mounted counter frame for Vienna with 15 counter places

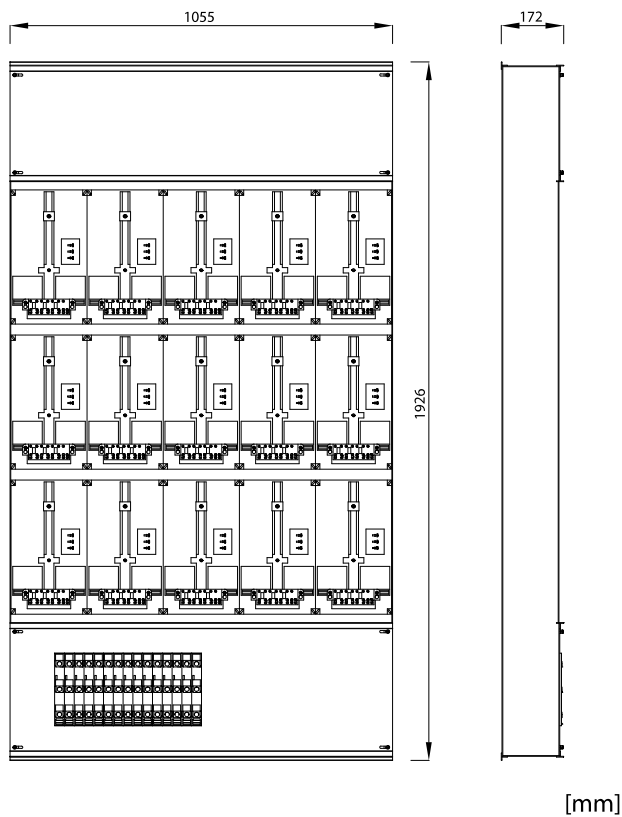

Article Table

DESCRIPTION	Order No.
Wall-mounted counter frame for Vienna with 15 counter places pre-wired, metal housing with meter panel made of plastic	IGZGSW15
Optional Accessories	
Feed-through terminal block PT 10 Push-in connection, cross section: 0.5 mm ² - 16 mm ² , AWG: 20 - 6, width: 10.2 mm, height: 49.5 mm, grey	IP3212120
Feed-through terminal block PT 10 BU Push-in connection, cross section: 0.5 mm ² - 16 mm ² , AWG: 20 - 6, width: 10.2 mm, height: 49.5 mm, blue	IP3212123
Feed-through terminal block PT 10-TWIN Push-in connection, cross section: 0.5 - 16 mm ² , AWG: 20 - 6, width: 10.2 mm, height: 49.5 mm, grey	IP3208746
Feed-through terminal block PT 10-TWIN BU Push-in connection, cross section: 0.5 - 16 mm ² , AWG: 20 - 6, width: 10.2 mm, height: 49.5 mm, blue	IP3208747
Ground modular terminal block PT 10-TWIN-PE Push-in connection, 0.5 - 16 mm ² , AWG: 20 - 6, width: 10.2 mm, height: 49.5 mm, green-yellow, NS 35/7.5, NS 35/15	IP3208745
End cover D-PT 10-TWIN End cover, length: 88.9 mm, width: 2.2 mm, height: 42.6 mm, color: grey	IP3208748
Fixed bridge SCBI 10-10 Fixed bridge, poles: 10, color: silver-colored	IP3246146