

Data Sheet for Article: LID15327--

Alis SQ 75W GU10 IP20 100-240V Dimm white

Ceiling recessed luminaire, adjustable




Technical Data

Dimmable	yes Depending on light source
Protection class	I
IP Rating	IP20
Light source	AR111
Illuminant incl.	no
Number of lamps	1
Lamp holder	GU10
Power (W)	75
Operating voltage AC (V)	100-240
Frequency (Hz)	50/60
Mounting	recessed mounting ceiling
Cut-out size (mm)	170x170
Mounting depth (mm)	150
Colour	White
Material	Die-cast aluminum
Lenght (mm)	150

Technical Data - continued

Width (mm)	150
Height (mm)	47
Optional Accessories	LID 16949--; LID 12191 --; LID 12192--; LID 13750--; LID 13106--
LxWxH mm	150x150x47
Cut-out size mm	170x170

Dimensioned drawing: Alis SQ 75W GU10 IP20 100-240V Dimm white

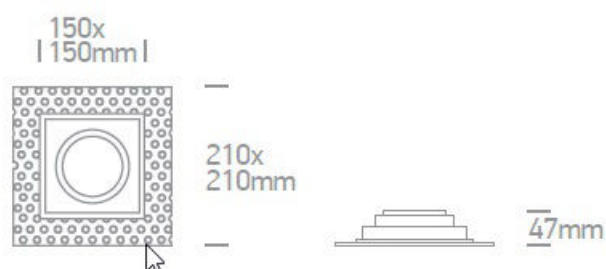

Article Table

DESCRIPTION	Order No.
Alis SQ 75W GU10 IP20 100-240V Dimm white	LID 15327
Ceiling recessed luminaire, adjustable	
Optional Accessories	
Through-hole quick-connector 32A, 2x L-N-PE	LID 16949
LED bulb 13W GU10 AR111 1200lm 4000K CRI80 230V 45°	LID 12191
LED bulb 13W GU10 AR111 1200lm 3000K CRI80 230V 45°	LID 12192
LED bulb 15W GU10 AR111 1200lm 3000K CRI80 230V 45° Dimm	LID 13750
Emergency for GU10 und E27 LED 3-7W 3h, Li-Ion 6,4V 3,0Ah	LID 13106
This kit will also operate with GU10 LED lamps suitable for 180V DC power supply (Emergency)	