

Data Sheet for Article: LID16590--

67516A/W/W WHITE COB 15W WW IP65 230V DARK LIGHT

Surface ceiling luminaire; 13 WALL & CEIL LED



Product Details

15W COB LED cylinder, IP65, suitable for indoor and outdoor_x000D_installation._x000D_Complete with non-dimmable LED driver._x000D_Complies with standard EN60598-1 and any other specific_x000D_standards.


Technical Data


Luminous flux (lm)	1200
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	≥90
Dimmable	no
Protection class	I
IP Rating	IP65
Luminaire type	ceiling luminaire
Illuminant incl.	yes
Lamp holder	LED Platine
Beam angle (°)	40
System efficiency (lm/W)	80
Power Factor	0,9

Technical Data - continued

Power (W)	15
Controller	LED driver
Operating voltage AC (V)	220-240
Input voltage AC (V)	220-240
Operation current mA (mA)	350
Frequency (Hz)	50/60
Mounting	surface mounting ceiling
Colour	White
Material	Aluminum
Height (mm)	127
Diameter (mm)	83
ØxH mm	83x127

Dimensioned drawing: 67516A/W/W WHITE COB 15W WW IP65 230V DARK LIGHT

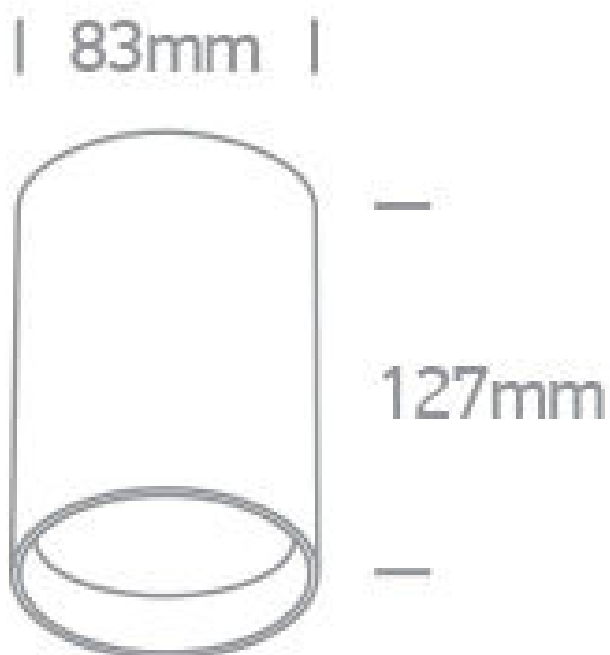

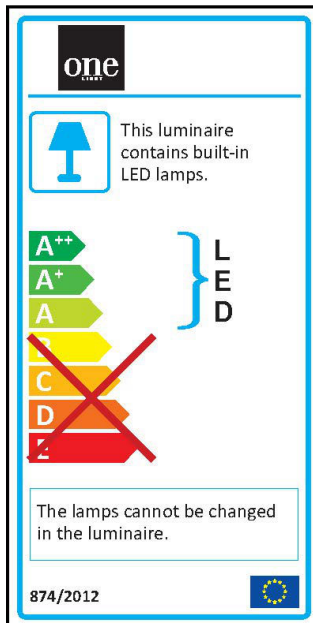Energieeffizienzklasse: 67516A/W/W WHITE COB 15W WW IP65 230V DARK LIGHT

DESCRIPTION	Order No.
67516A/W/W WHITE COB 15W WW IP65 230V DARK LIGHT Surface ceiling luminaire; 13 WALL & CEIL LED	LID16590