

Data Sheet for Article: LIHGWA16--


LIVA LED PIR 12,5W 550lm 3000K IP54

anthracite

LED Wall luminaires with PIR Sensor for outdoor



Light distribution curve






Technical Data

Net length (mm)	80,00
Net width (mm)	168,00
Net height (mm)	273,00
Net weight (kg)	0,80
Luminaire type	wall luminaire
Colour	RAL 7016 (anthracite)
Material	Aluminum PC
Beam angle (°)	110
Operating voltage AC (V)	220-240
Temperature range - Operation (°C)	-20 to +40
Lamp holder	LED Platine
System efficiency (lm/W)	44
Power (W)	12,50
Light colour	warm white
Colour temperature (K)	3000
Colour rendering index (Ra)	>80
Luminous flux (lm)	550
Service life	25.000h
Dimmable	no
Protection class	I
IP Rating	IP54
Shock strength	IK08
Illuminant incl.	yes
Detection beam (m)	2.0-7.0
Detection angle (°)	100
LxWxH mm	80x168x273
Numbers of luminars per MCB B10	28
Numbers of luminars per MCB B13	37
Numbers of luminars per MCB B16	46
Numbers of luminars per MCB C10	43
Numbers of luminars per MCB C16	69

LIHGWA16

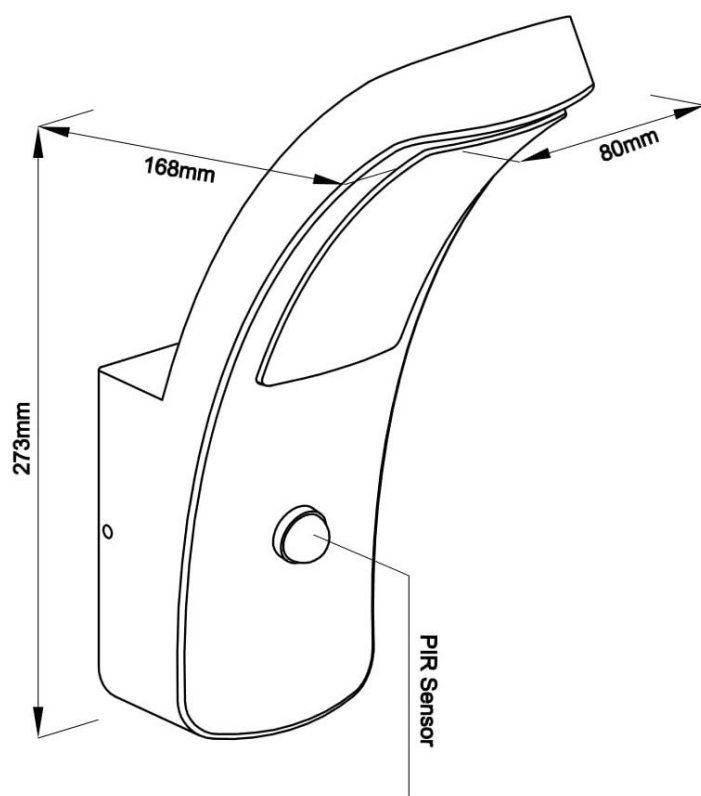

Article Table

DESCRIPTION	Order No.
LIVA LED PIR 12,5W 550lm 3000K IP54 anthracite	
LED Wall luminaires with PIR Sensor for outdoor	LIHGWA16