

Data Sheet for Article: NLZ1WA39EL

Emergency luminaire Z1 6W ERT-LED 230V EL wall mounting

Cast aluminium, colour anthracite, IP65, IK06, -30° to 40°C, protection class I, light colour: 4000K, with supervision - centrally switchable




Technical Data

Net width (mm)	215,00
Net height (mm)	110,00
Netto depth (mm)	85,00
Net weight (kg)	1,16
Luminaire type	safety luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	metal luminaire
Design	Z1
Colour	Anthracite
Illuminant	ERT-LED (6,1W)
Lumen	550
Voltage range (V)	230V AC 50Hz ±20%; 230V DC ±20%

Technical Data - continued

IP Rating	IP65
Mounting	surface mounting wall
Min. ambient temperature (°C)	-30
Max. ambient temperature (°C)	40
AA Class E 8101	AA3 AA4 AA5

Dimensions (mm)

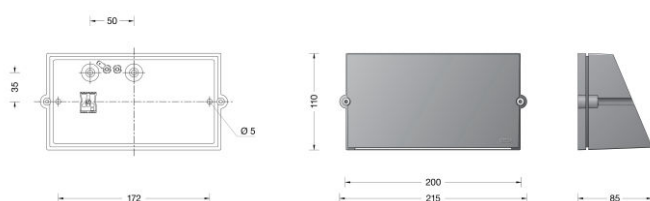

Illumination table - min. illumination: 1 lx - maintenance factor 0.8

Montagehöhe [m]		
2	3,46	7,76
2,5	4,23	9,28
3	4,80	10,06
3,5	5,28	10,76
4	5,69	11,38
5	6,31	12,30
6	6,73	12,92
7	7,00	13,28
8	7,09	13,38
9	7,02	13,16
10	6,80	12,62
11	6,44	11,78
12	5,83	10,48

Article Table

DESCRIPTION	Order No.
Emergency luminaire Z1 6W ERT-LED 230V EL wall mounting	
Cast aluminium, colour anthracite, IP65, IK06, -30° to 40°C, protection class I, light colour: 4000K, with supervision - centrally switchable	NLZ1WA39EL